


Der neue Befehl 'nsrgrpcomp'

Er wurde mit dem NetWorker 8.0.0 ohne große Ankündigung eingeführt. Sein Zweck ist es, die verschiedenen Logs der einzelnen Phasen und Save Sets einer Gruppe in einem 'Bericht' zusammenzufassen. Hierzu ein Beispiel.

Gegeben sei der erfolgreiche Ablauf dieser Gruppe; in ihrem Verlauf wurden diese 4 Sicherungen angelegt:

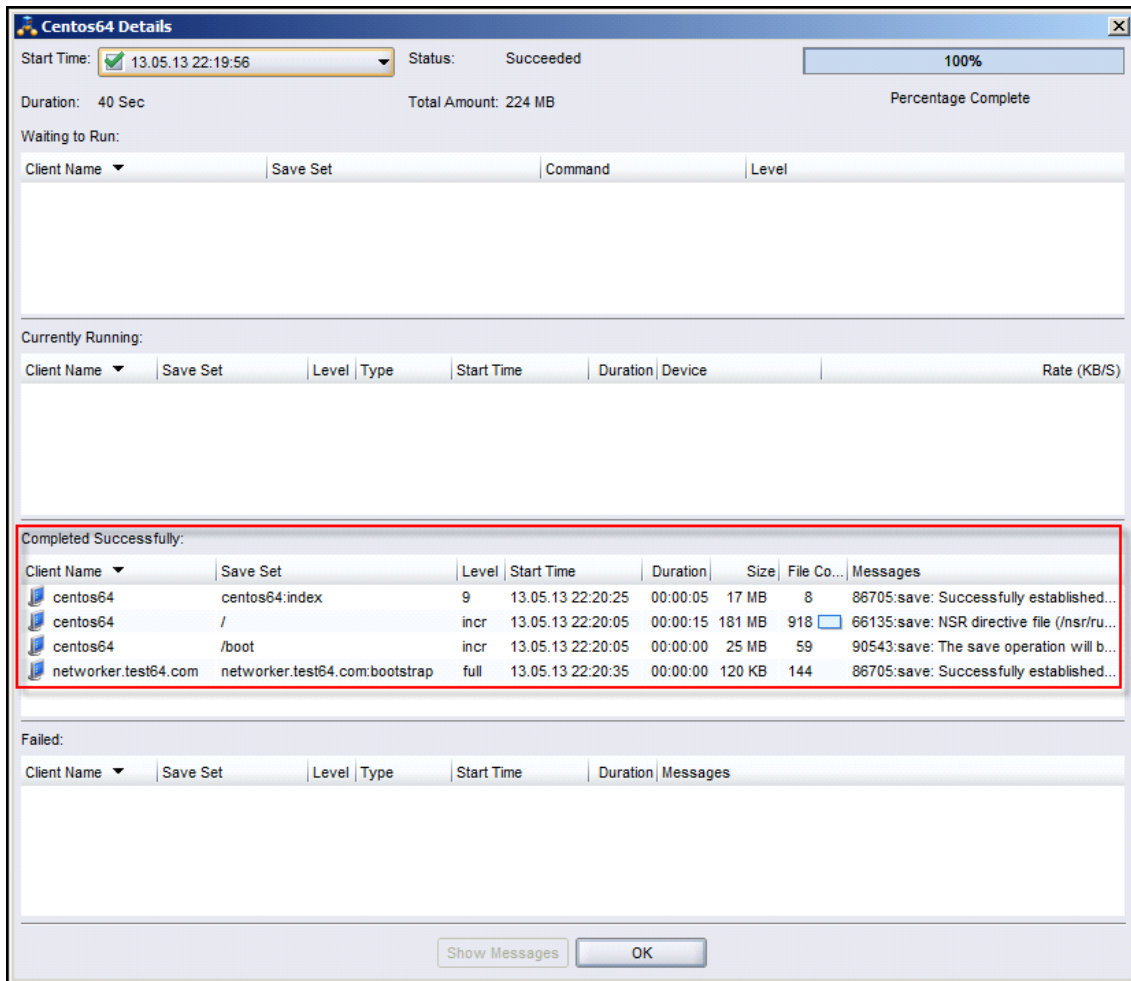

Centos64 Details

Start Time: 13.05.13 22:19:56 Status: Succeeded 100%

Duration: 40 Sec Total Amount: 224 MB Percentage Complete

Waiting to Run:

Client Name	Save Set	Command	Level

Currently Running:

Client Name	Save Set	Level	Type	Start Time	Duration	Device	Rate (KB/S)

Completed Successfully:


Client Name	Save Set	Level	Start Time	Duration	Size	File Co...	Messages
centos64	centos64:index	9	13.05.13 22:20:25	00:00:05	17 MB	8	86705:save: Successfully established...
centos64	/	incr	13.05.13 22:20:05	00:00:15	181 MB	918	66135:save: NSR directive file (/nsr/ru...
centos64	/boot	incr	13.05.13 22:20:05	00:00:00	25 MB	59	90543:save: The save operation will b...
networker.test64.com	networker.test64.com:bootstrap	full	13.05.13 22:20:35	00:00:00	120 KB	144	86705:save: Successfully established...

Failed:

Client Name	Save Set	Level	Type	Start Time	Duration	Messages

Buttons: Show Messages, OK

Im Log-Verzeichnis sind jedoch 6 Reports zu finden. Die Ursache liegt darin, daß hier u.a. auch die Logs der sog. *Probe* (savefs) Phase enthalten sind, die in den *Group Details* nicht erscheinen:

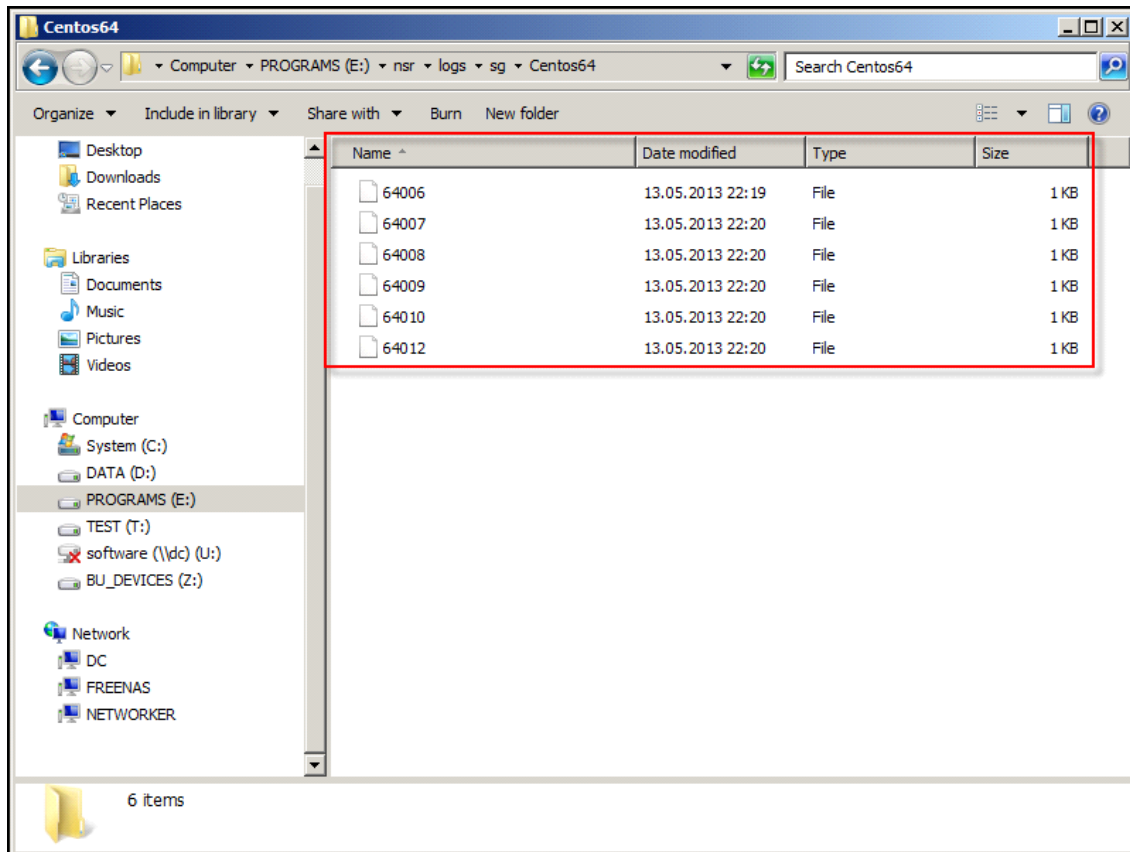

Durch einfaches Ausgeben der Inhalte können Sie schließlich auch die letzte Phase erkennen - es handelt sich um die Ausgabe des *Savegroup Completion Reports* per SMTP Mail:

```

Administrator: Command Prompt
E:\nsr\logs\sg\Centos64>type 64006 ←
savefs centos64: succeeded.

E:\nsr\logs\sg\Centos64>
E:\nsr\logs\sg\Centos64>type 64007 ←
90543:save: The save operation will be slower because the directory entry cache
centos64: /boot level=incr, 25 MB 00:00:05 59 files
completed savetime=1368476400

E:\nsr\logs\sg\Centos64>
E:\nsr\logs\sg\Centos64>type 64008 ←
66135:save: NSR directive file (</nsr/run/.nsr>) parsed
66135:save: NSR directive file (</nsr/cores/nsrexecd/.nsr>) parsed
centos64: / level=incr, 181 MB 00:00:14 918 files
completed savetime=1368476403

E:\nsr\logs\sg\Centos64>
E:\nsr\logs\sg\Centos64>type 64009 ←
86705:save: Successfully established DFA session with adv_file device for save-s
:index:20677ba3-00000004-51798310-51798448-00020c00-17c0c729).
networker.test64.com: index:centos64 level=9, 17 MB 00:00:06 8 files
completed savetime=1368476423

E:\nsr\logs\sg\Centos64>
E:\nsr\logs\sg\Centos64>type 64010 ←
86705:save: Successfully established DFA session with adv_file device for save-s
:bootstrap).
networker.test64.com: bootstrap level=full, 121 KB 00:00:01 144 files
completed savetime=1368476431

E:\nsr\logs\sg\Centos64>
E:\nsr\logs\sg\Centos64>type 64012 ←
7425 1368476436 2 0 0 1388 988 0 networker.test64.com smtpmail NSR warning 17 un

E:\nsr\logs\sg\Centos64>_
  
```